



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### 2015 BALSA WOOD BRIDGE DESIGN RULES

#### MATERIALS

Balsa wood and glue are the only materials to be used.

**Balsa Wood:** The maximum permissible cross-section size is  $\frac{1}{4}$ " x  $\frac{1}{4}$ ". Pieces of smaller cross-section may be used to economize on weight. Pieces of larger cross-section may be fabricated by gluing several  $\frac{1}{4}$ " x  $\frac{1}{4}$ " pieces together. For example, it is permissible to glue together three pieces of  $\frac{1}{4}$ " x  $\frac{1}{4}$ " cross section balsa wood to make one piece that is  $\frac{1}{4}$ " x  $\frac{3}{4}$ " in cross-section. It is important to make sure that the model shop gives you balsa wood since many shops also carry other woods which may look similar to balsa.

**Glue:** Bridges may be built using any type of glue.

Consider the following when choosing glue:

1. *ZAP A GAP*, or similar glues which are known as cyanoacrylates, are very convenient. Cyanoacrylates "set up" or "dry" quickly, usually in less than 30 seconds. This allows you to move along quickly building your bridge. *ZAP A GAP* is usually more expensive than the other brands of cyanoacrylate. All brands of cyanoacrylate are expensive, so be careful when you use it. A little goes a long way.
2. When using *ZAP A GAP* or similar glues it is important to have a debonder readily available since the glues set so quickly that fingers are often stuck to the bridge or to each other. Debonder is usually available at the store where the glue is purchased.
3. Other types, like Elmer's White glue or Elmer's Carpenter's Glue, may be used. However the "set up" or "drying time" is usually 30 to 45 minutes and they do not achieve full strength for 24 hours or more. That means you will have to hold the pieces of your bridge together for a long time with your fingers or pins or clamps. If you are building your bridge in class the glue will not "set up" by the time you are ready to leave.
4. On the other hand, some bridge builders feel that carpenter's glue is stronger than cyanoacrylate glue. Also, using carpenter's or white glue avoids the problem of accidentally gluing ones fingers together, which is a definite advantage for younger bridge builders.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### BUILDING TEAMWORK SKILLS

Engineers usually work in teams, but most classroom assignments are structured as individual activities. Essential teamwork skills do not always come naturally, but they can be cultivated. Bridge building affords a rare opportunity to learn and practice the engineering team approach to problem solving. Students that work in teams, as engineers do, usually produce better results. Experience has taught us that the ideal team size for this project is three team members. However, the number of students that want to participate is often not evenly divisible by three. Also, special cases sometimes necessitate more than three members on a team. Therefore, the contest rules permit teams that have as few as three or as many as four team members. Each class, club chapter, or group can sponsor no more than two teams. For example, a school with an after school science club can send up to two teams to the contest. A science and technology magnet school that has three engineering classes can send up to six teams to the contest, two from each class.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### DESIGN AND CONTEST RULES

1. The bridge shall be designed and constructed by a team of students consisting of at least three and a maximum of four students. Each class, club chapter, or group can sponsor no more than two teams.
2. The bridge contest will be scored on the following four areas of achievement:
  - a. **Load capacity** - The bridge will be loaded to determine how much weight it can support.
  - b. **Design Drawings** - Score will depend on:
    - i. Resemblance - The accuracy of the drawings in relationship to the bridge. The drawings may be full size or to scale.
    - ii. Dimensioning - Proper indication of the height, width and length of various parts of the bridge.
    - iii. Completeness of title block - Must indicate: Name of project, school name, teacher name, team name, team members, grade levels and date of completion.
    - iv. Appearance and neatness - Quality and cleanliness of the representation.
  - c. **Craftsmanship** - The workmanship and care taken in constructing the bridge.
  - d. **Originality** - Imaginative or innovative concepts used in design and construction of the bridge.
3. The bridge must be "free standing."
4. The bridge must be constructed so as to allow a 400 mm long by 20 mm high board to slide underneath it. This means the minimum "span" of the bridge is 400 mm.
5. The maximum height of the bridge is 300 mm.
6. The minimum height of the "roadway surface" is 100 mm above the surface supporting the bridge.
7. The bridge must provide a "roadway surface" that is approximately level across which a small metal car of Hot Wheels or Matchbox variety may roll, given a slight push of the hand. The roadway surface must have a minimum width of 46 mm. The roadway surface must extend the entire length of the completed bridge.
8. The maximum length of the bridge shall not exceed 550 mm and the width shall not exceed 100 mm.
9. Total mass of the bridge, including glue, may not exceed 110 grams.
10. No fastening method other than mechanical interlock of the balsa pieces or commercial glue is allowed.
11. The bridge design must allow the standard testing block to be placed on the roadway surface with the testing rod(s) extending beyond the sides of the bridge. The standard



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



testing block is shown on the drawings attached to these instructions. Alternatively a  $\frac{3}{4}$  inch hole may be provided for a metal rod to extend up through the deck for the testing block to be affixed.

12. The bridge may not be painted or coated in any way including coating of members with glue.
13. The failure of the bridge will be when:
  - i. Catastrophic destruction takes place.
  - ii. The vertical force applied drops to zero.
  - iii. The downward deflection of the bridge exceeds 200 mm. The load that the bridge sustained when the deflection reached 200 mm will be considered to be the failure load
14. In order to prevent damage to the bridge during transportation to the contest, during handling and during the contest, each bridge should be in a protective container such as a cardboard box. The bridge should be fabricated of high enough craftsmanship to withstand normal handling by the judges. The contest supervisors are not responsible for any damage to bridges protective container or not.
15. All bridges, when presented for judging at the competition shall have, a way of identification which shall indicate the school name, teacher name, team name, team members and grade levels.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### JUDGING

1. Bridges will be visually inspected, measured and weighed for compliance to the rules. Bridges failing to pass these requirements will not be scored in the competition. The failed bridges may be load tested at the discretion of the judges, if the team requests the test.
2. Bridge design drawings will be examined and compared with the completed bridge.
3. Points will be given for craftsmanship, originality and design drawings.
4. The bridge will be load tested after passing the weight, dimensional and materials examination.
5. The load capacity test will be conducted with a Pitsco Structure Testing Instrument as follows:
  - a. The bridge will be placed on the testing stand consisting of two flat, level surfaces which will be level with respect to each other and separated by approximately 350 mm.
    - i. A 17 x 4 cm testing block will be placed on the roadway surface at the center of the span with a 12.5 mm diameter rod extending beyond the sides of the bridge. The load shall be applied to the bridge from  $\neq$  two rods placed in slots in the test block symmetrical about the center of the span. A 17 x 4 cm testing block will be placed on the roadway surface at the center of the span with 12.5 mm diameter rod extending up through the bridge. The load shall be applied to the bridge using the rod placed in a hole in the test block symmetrical about the center of the span.
    - ii. Whether option i. or ii. is used will be determined by the design of the bridge. If either option would work, the tester will use one rod (option ii).
  - b. A testing device will slowly apply pressure downward until one of the following occurs:
    - i. Catastrophic destruction takes place.
    - ii. The vertical force applied drops to zero.
    - iii. The downward deflection of the bridge exceeds 200 mm. The load that the bridge sustained when the deflection reached 200 mm will be considered to be the failure load.
  - c. If there is more than one bridge which attains the same load capacity at failure, the position of an entry will be decided by comparing the efficiency of the bridges. The efficiency of each bridge will be determined by dividing the load at failure by the weight of the bridge.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### SCORING

$$\text{Efficiency}(\%) = \frac{\text{Failure load}}{\text{Weight of Bridge}} \times 100$$

<u>Category</u>	<u>Points</u>	<u>Maximum Points</u>
Craftsmanship	0 to 10	10
Originality	0 to 10	10
Design Drawing	0 to 10	10
Load Capacity	Highest	70
	2nd Highest	60
	3rd Highest	50
	All Others	30

### ESTIMATING BRIDGE WEIGHT

Balsa wood is a natural material, so properties such as weight density and strength can vary. Bridge builders use several methods to ensure their bridges do not exceed the maximum allowable weight of 110 grams:

Method 1: Weigh out a 95 gram “kit” of balsa wood pieces, which allows for 15 grams of glue. Limit yourself to the pieces that are in your kit. Your finished bridge cannot weigh more than the materials that go into it. Nevertheless, it is wise to weigh your finished bridge to confirm that it is not overweight.

Method 2: Calculate the weight. Determine the average linear density of each size of balsa that is used in bridge design. Put ten pieces of a given size balsa on an accurate balance of scale. Divide the weight in grams by the total length of the ten pieces. For example, ten 36-inch pieces of 1/4” x 1/4” balsa might weigh 55 grams. The total length is 360 inches. Therefore the linear density is: 55 grams/ 360 inches = 0.153 grams per inch.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



The linear densities in the following table are typical. However, bear in mind that balsa wood is a natural material. Characteristics such as weight and strength can vary depending on the source, and the grade purchased. It is best to weigh your balsa and derive your own table.

### Typical Balsa Wood Weights

1/4" x 1/4"	Balsa – 36" long	5.5 Grams/36" stick	(0.153 Grams/inch)
1/4" x 1/8"	Balsa – 36" long	4.74 Grams/36" stick	(0.132 Grams/inch)
1/8" x 1/8"	Balsa – 36" long	2.00 Grams/36" stick	(0.056 Grams/inch)
1/4" x 1/16"	Balsa – 36" long	2.40 Grams/36" stick	(0.067 Grams/inch)

You can calculate how much your bridge will weigh using this guide and measuring the lengths of the various wood sizes you intend to use in your design. Remember the weight of the glue usually is 15% of the weight of the completed bridge. The weight of the wood then would be 85% of 110 Grams or about 93 Grams. Be careful! Wood can vary in weight in accordance with moisture content and the tree it is sawn from. The heartwood in the tree has greater density than the outer wood. It is well to weigh your bridge as you go along to make sure you stay within the 110 Gram limit.



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



Bridge Weight Calculation Example						
Member Main Supports	Size	Number	Length in Inches	Total Length in Inches (Number x	Unit Weight G/inches	Total Weight in Grams (Length x
<b>A Sides</b>						
Columns	1/4 x 1/4	16	12 5/8 avg	202	0.153	30.90
Tension Bars	1/4 x 1/4	4	20 1/2	82	0.153	12.54
Tension Cross	1/4 x 1/8	1	3 1/2	3 1/2	0.132	0.46
Cross Braces	1/4 x 1/16	20	3	60	0.067	4.00
	1/4 x 1/16	8	4 3/4	38	0.067	2.54
	1/4 x 1/16	8	4	32	0.067	2.14
<b>BEA Rings</b>						
Vertical	1/4 x 1/4	64	1 1/4	80	0.153	12.24
Binders	1/4 x 1/8	8	3 1/2	28	0.132	3.69
	1/4 x 1/8	8	2	16	0.132	2.11
Crown	1/4 x 1/4	18	1 1/2	27	0.153	4.13
	1/4 x 1/8	2	3	6	0.056	0.33
End Bents	1/4 x 1/16	4	9 1/2	32	0.067	2.54
	1/4 x 1/16	6	3 5/8	21 3/4	0.067	1.45
	1/4 x 1/16	8	2	16	0.067	1.07
Roadway	1/4 x 1/16	14	10 1/4	143.5	0.067	9.61
	1/4 x 1/16	8	2	16	0.067	1.07
Total Balsa Wood Weight						90.82 G
Add 15% for Glue						13.62 G
Estimated Bridge Weight						104.44 G
Actual Weight on Scale						105.0 G

### ESTIMATING BRIDGE CAPACITY

Most balsa wood bridge builders do not calculate bridge capacity. However, free software, such as “West Point Bridge Designer” can be found online, or students that have a basic knowledge of vectors and statics may want to manually analyze their designs.

It is helpful to know the relative forces in each member, even if actual material properties are unknown. This is accomplished by simply by running programs based on assumed values and comparing the stresses that are calculated for each member.

In any case, a good basic design value for stresses in the balsa wood is about 1,000 pounds per square inch of area in both tension and compression.





## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### SCORING THE CONTEST

Bridge Building Competition Scoring Chart						
Team Number and Name						
Load at Failure						
Weight						
Actual Weight in Grams						
Disqualified if more than 110 Grams						
Dimensions OK?    Yes No						
Scoring Category		Judge 1	Judge 2	Judge 3	Judge 4	Average Score
Craftsmanship	0-10					
Originality	0-10					
Design Drawing	0-10					
Load Capacity						
Highest	70					
Second Highest	60					
Third Highest	50					
All Others	30					
Total Points						

If a tie occurs, highest load place will be decided by the team with the highest efficiency rating.

$$Efficiency (\%) = \frac{\text{Failure load}}{\text{Weight of Bridge}} \times 100$$



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### TYPICAL BILL OF MATERIAL

Materials and Supplies Required to Construct One Bridge Drawing and One Bridge:

#### General Store Purchases


- Roll of wax paper
- Packet of straight pins (about 1 inch in length with round head)
- Glue debonder (acetone – nail polish remover)
- Gallon size Zip type plastic bags
- Rubber band
- Needle nose pliers

#### Hobby Shop or Craft Store or Home Store Purchases

- Working board of cork or Styrofoam
- One modeling saw with fine blade
- One mitre box for modeling saw
- Small bottle of cyanoacrylate glue (super glue)
- Metric scale (or ruler)
- Straight edges and triangles (for drawing)
- Scale for weighing bridge (electronic or postal type)
- Balsa wood in 36" lengths:
  - 18 pieces of 1/4" by 1/4"
  - 6 pieces of 1/4" by 1/8"
  - 10 pieces of 1/4" by 1/16"



# SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION

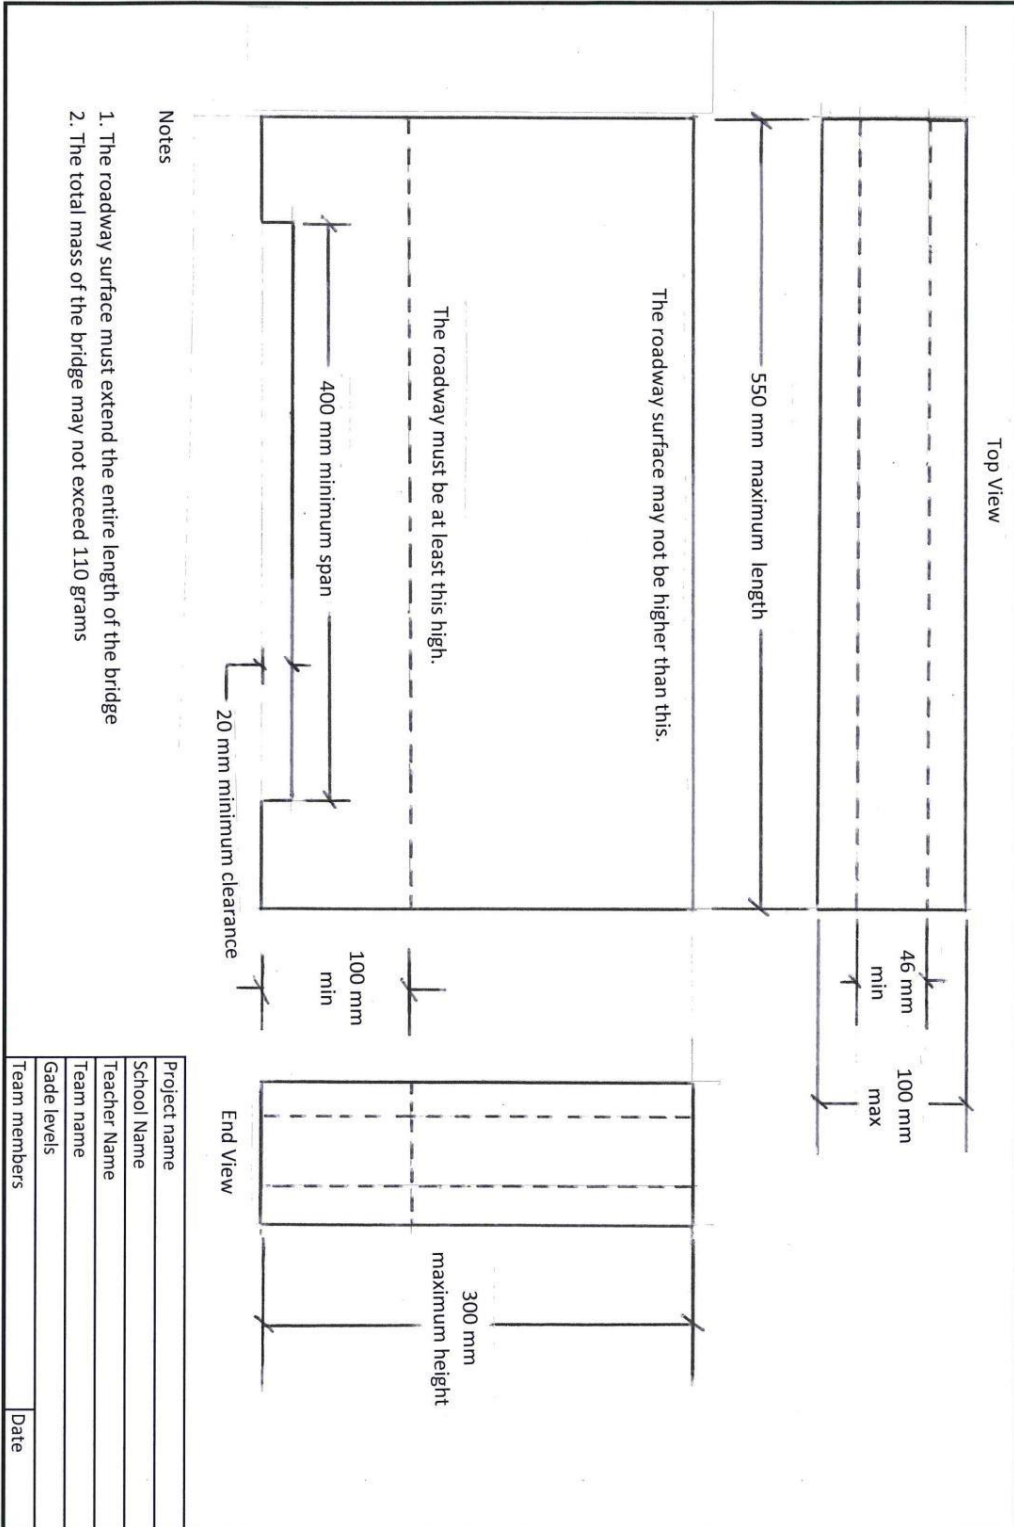



## SELMON EXPRESSWAY BRIDGE DESIGN COMPETITION



### HOW DO THEY DO IT?

PBS.ORG-Building Big

Go to: <http://www.pbs.org/> Or  
<http://www.pbs.org/wgbh/buildingbig/bridge/>

Click on: Search

Type in: ***Building Big***

Click on: ***All About Bridges***

Click on: ***Bridge Basics***

After you review this section, Go  
Back

Click on: ***Forces Lab*** to review  
forces, loads, materials & shapes  
After you review this section, Go  
Back

Click on: ***Bridge Challenge.***  
Try it!